

# JKS7.2K-3.6HLVS JKS9.6K-5HLVS JKS19.2K-8HLVS


more powerful  
more efficient

New intelligent platform use new energy



## Key Figures

- Future conception for solar
- Charge controller and inverter integrated
- Intelligent battery management function
- Capable of being grid-interactive or grid-independent
- More security & performance for same costs
- Battery max. discharge power up to 8 kW
- Monitoring inverters freely via computers or mobile phones
- Back-Up Mode can integrate with diesel generator

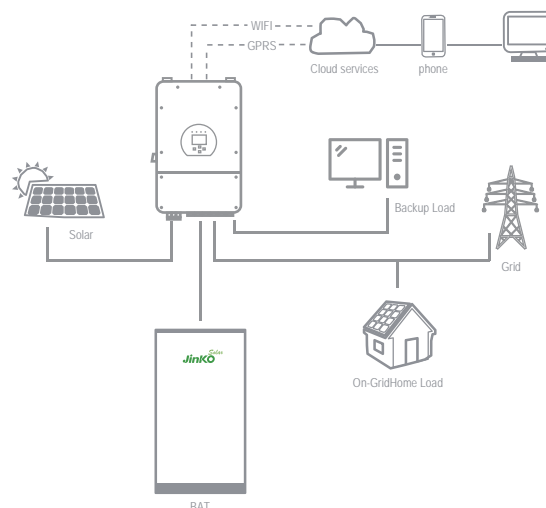

## SPECIFICATIONS

System capacity		3.6kW-7.2kWh	5kW-9.6kWh	8kW-19.2kWh
<b>INPUT PV</b>	Max.recommended PV panel power[W]	4.68kW	6.5kW	10.4kW
	Max.DC voltage[V]	500V		
	Input voltage range[V]	100V-500V		
	Norminal DC operating voltage[V]	370		
	Max. input current(per mppt)[A]	12.5	12.5	22
	Max. short circuit current(per mppt)[A]	20+20	20+20	20x2+20x2
	MPPT voltage range[V]	125-425V		
	No. of MPP trackers	2		
	Strings per MPP tracker	1+1	1+1	2+2
<b>BATTERY</b>	Battery type	LFP		
	Norminal battery energy[kwh]	7.2kWh	9.6kWh	19.2kWh
	Battery voltage range[V]	42-51.5V		
	Norminal battery voltage [V]	48		
	Max.charge/discharge current[A]	76.5/90	100/120	150/185
	Communication interfaces	R485/CAN		
	<b>OUTPUT AC</b>	Grid type	1Φ 3W 230V	
Rated grid Frequency[Hz]		50/60		
Norminal AC output power[W]		3600	5000	8000
Norminal AC output current[A]		15.7	21.7	35
Max. AC output current[A]		18	24	40
<b>OUTPUT EPS</b>	EPS rated voltage[V]	230		
	EPS rated Frequency[Hz]	50Hz/60Hz		
	EPS rated power[W]	3600	5000	8000
	EPS peak power[W]	3960	5500	8800
<b>EFFICIENCY</b>	PCS Certifications	97.6%		
	Battery safety certifications	95%		
<b>CERTIFICATION</b>	Max. PV to AC efficiency	VDE0126, IEC62109-1/2, IEC61683		
	Max. Battery to AC efficiency	UL1973,IEC62619, UN38.3		
<b>ENVIRONMENT LIMIT</b>	IP Level	IP65(Inverter) IP55(Battery)		
	PCS operating temperature range[ C ]	-25-60 C , >45 C Derating		
	Battery operating temperature range[ C ]	0-45		
	Altitude[m]	2000		
<b>OTHERS</b>	Noise emission(typical)[dB]	<30		
	Cooling concept	Natural convection		
	Insulating method	Transformerless		
	Communication	External:APP/Web Battery:CAN2.0		
	Warranty	5 years / 10 years(optional)		
<b>DIMENSIONS AND WEIGHT</b>	Cabinet dimensions[mm]	510x1130x290mm		
	Cabinet weight[kg]	116	140	140
	PCS dimensions[mm]	580x208x330mm	680x233x420mm	680x233x420mm
	PCS weight [kg]	20.5	20.5	32

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© Jinko Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.